
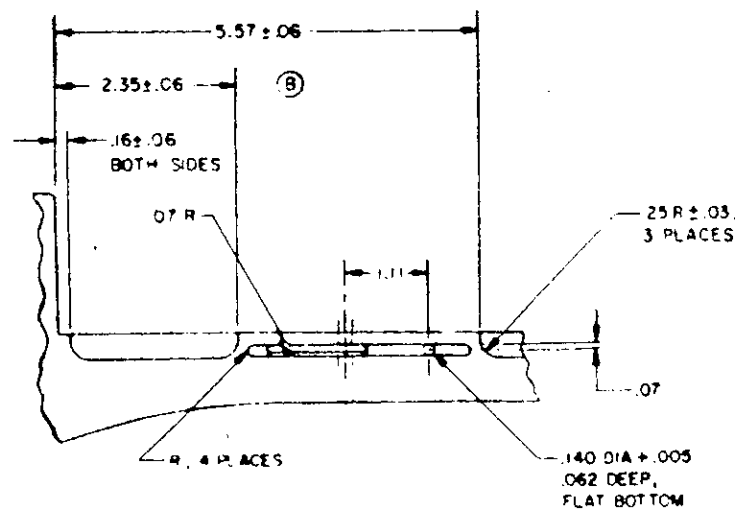
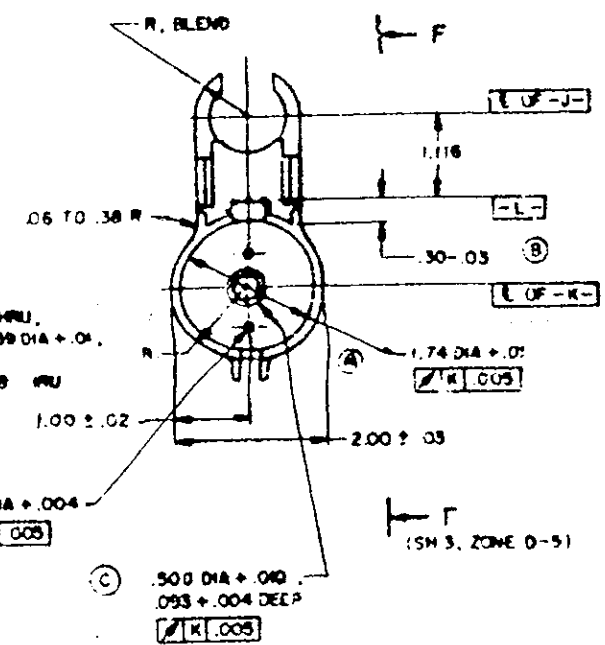
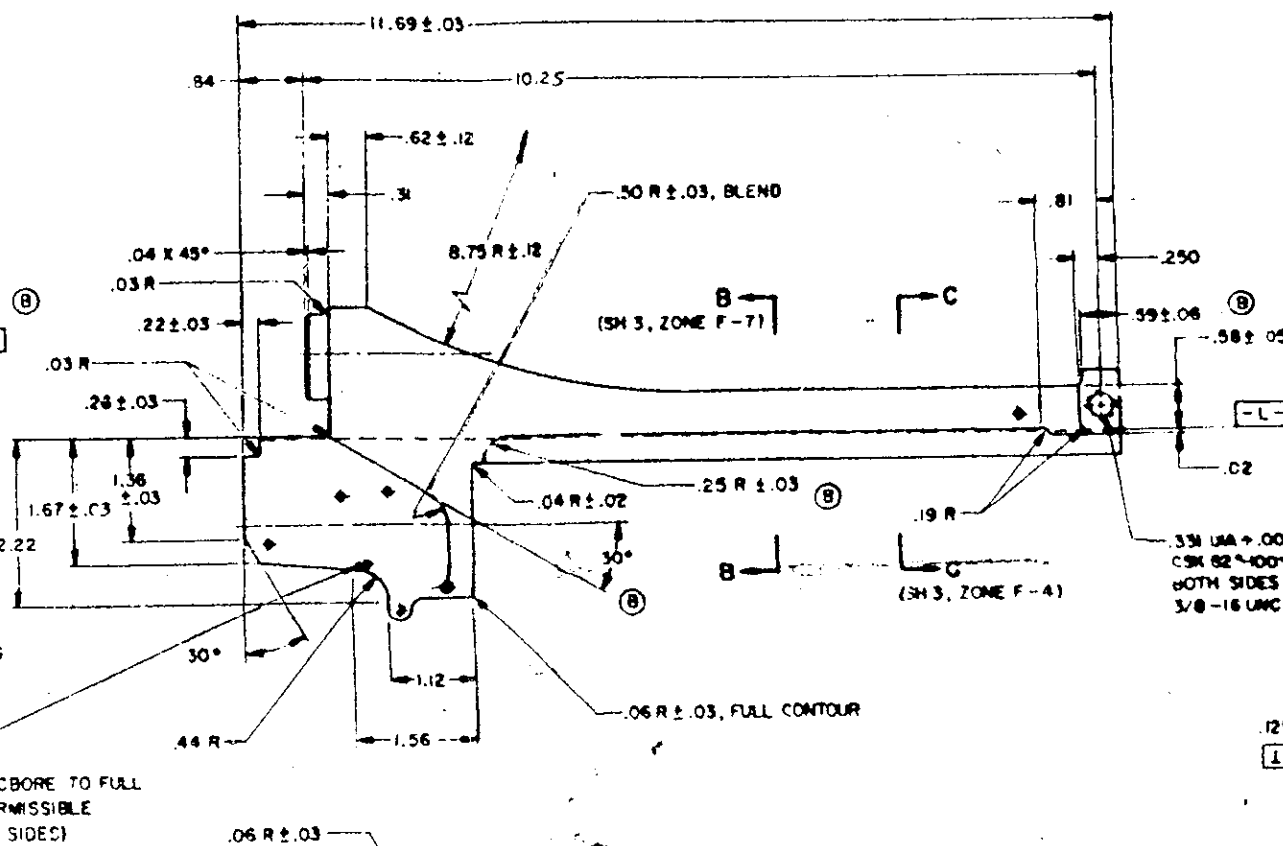
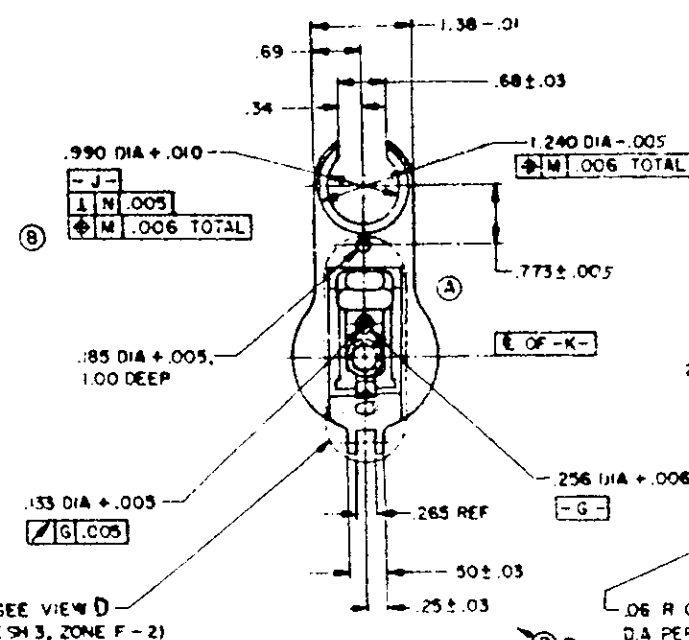


VISIT...

LANZAROTE
Caliente.COM

NOTES:

1. FINISH $\sqrt{25}$ UNLESS OTHERWISE SPECIFIED.
2. ALL EDGES SHALL BE BROKEN $.005 \pm .010$ UNLESS OTHERWISE SPECIFIED.
3. INSIDE CORNER RADI $.015 - .010$ UNLESS OTHERWISE SPECIFIED.
4. MATERIAL:
A. FOR WROUGHT MATERIAL:
AL ALY, 2024, TEMPER T4, SPEC QQ-A-225/6.
B. FOR FORGING MATERIAL:
AL ALY, 6151, TEMPER T6, SPEC QQ-A-367.
5. FINAL PROTECTIVE FINISH:
ANODIC FILM, TYPE III, CLASS 2,
MIL-A-8625. SEAL IN 1 1/4% AQUEOUS
SOLUTION OF NICKEL ACETATE AT 180°F
FOR 10 MINUTES. COLOR BLACK NO. 37038
TO DARK GRAY NO. 36081 OF FED-STD-595.

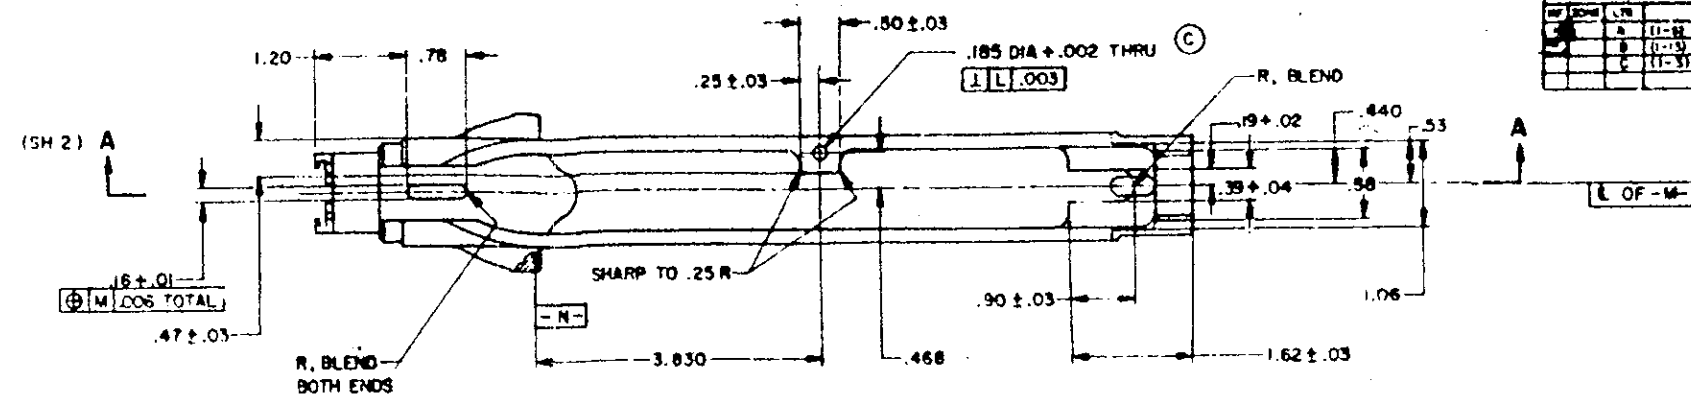

VIEW E-E
(SM 1, ZONE B-4)

SEE VIEW R
(SM 2, ZONE C-2)

MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED		ORIGINAL DATE OF DYNAMICS		PART NO 8448338	
1	8448338	LAUNCHER, GRENADE	SEE NOTE 4	1 AUG 99	ROCK ISLAND ARSENAL, ROCK ISLAND, IL 61201	RECEIVER	
2	40 MIN	SEE NOTE 5					
3	SEE ASSY						
4	APPLICATION						
				F 10204		8448338	